


ROOF BOX Fitting Instructions

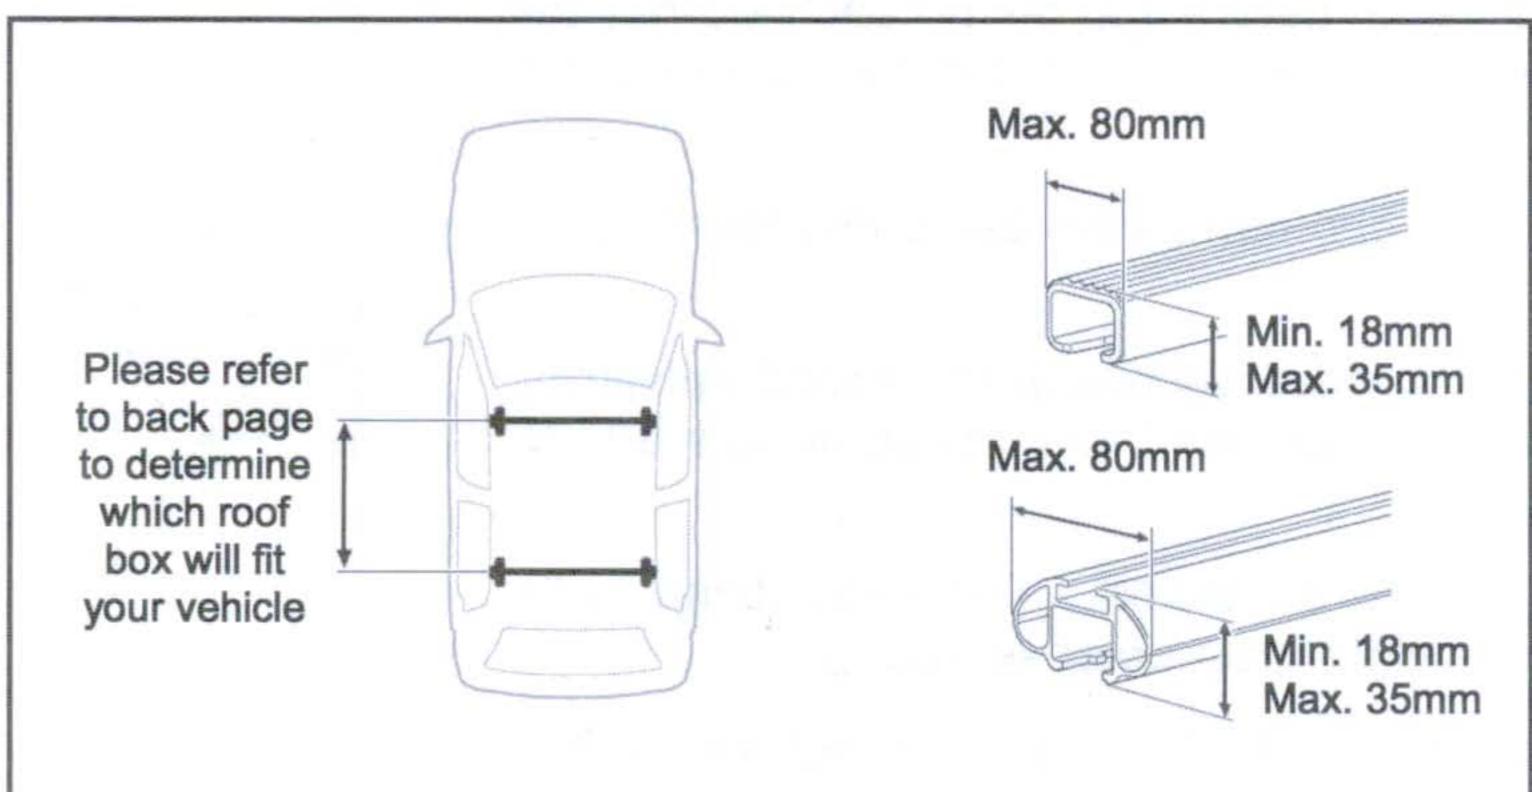


Ensure that the roof box you have purchased will fit your car and that your roof bars are of a suitable size to fit the fitting kit supplied with this roof box.

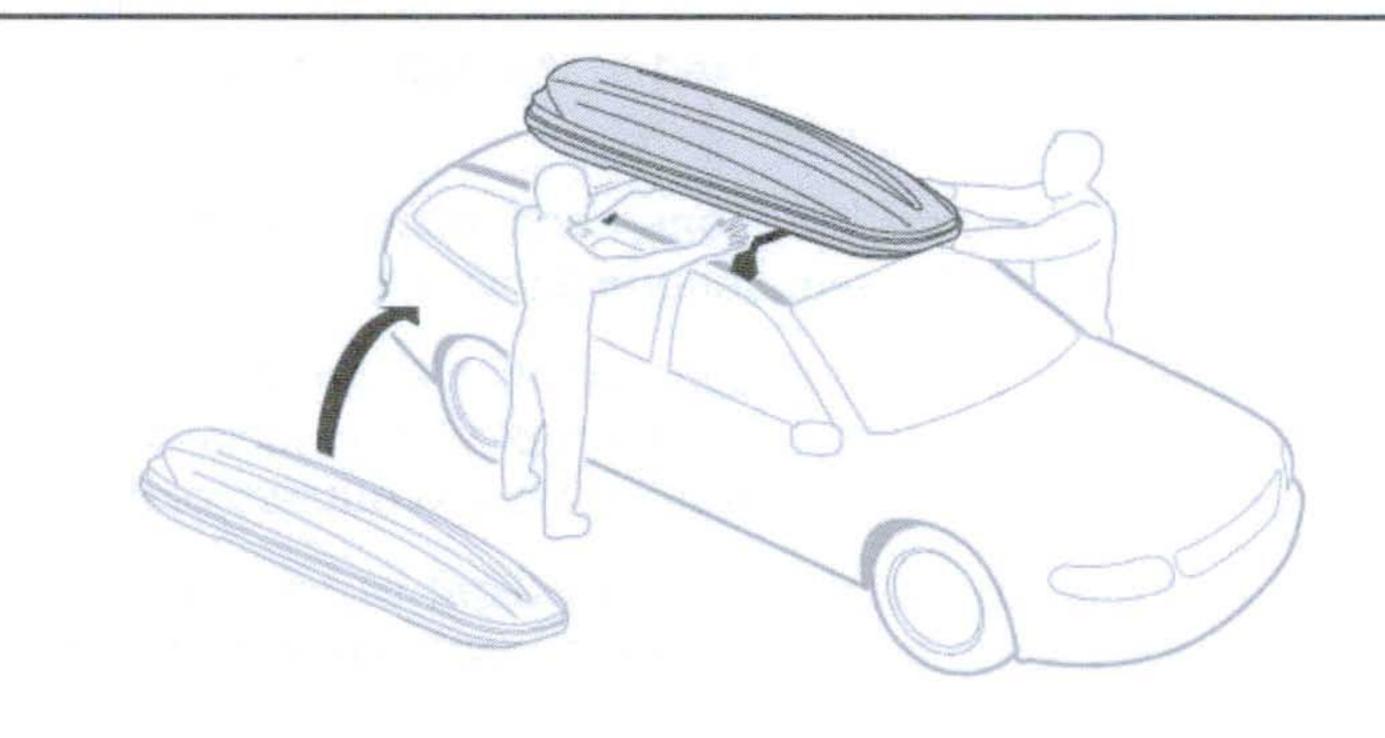


It is recommended to obtain help when placing the roof box onto your roof bars.

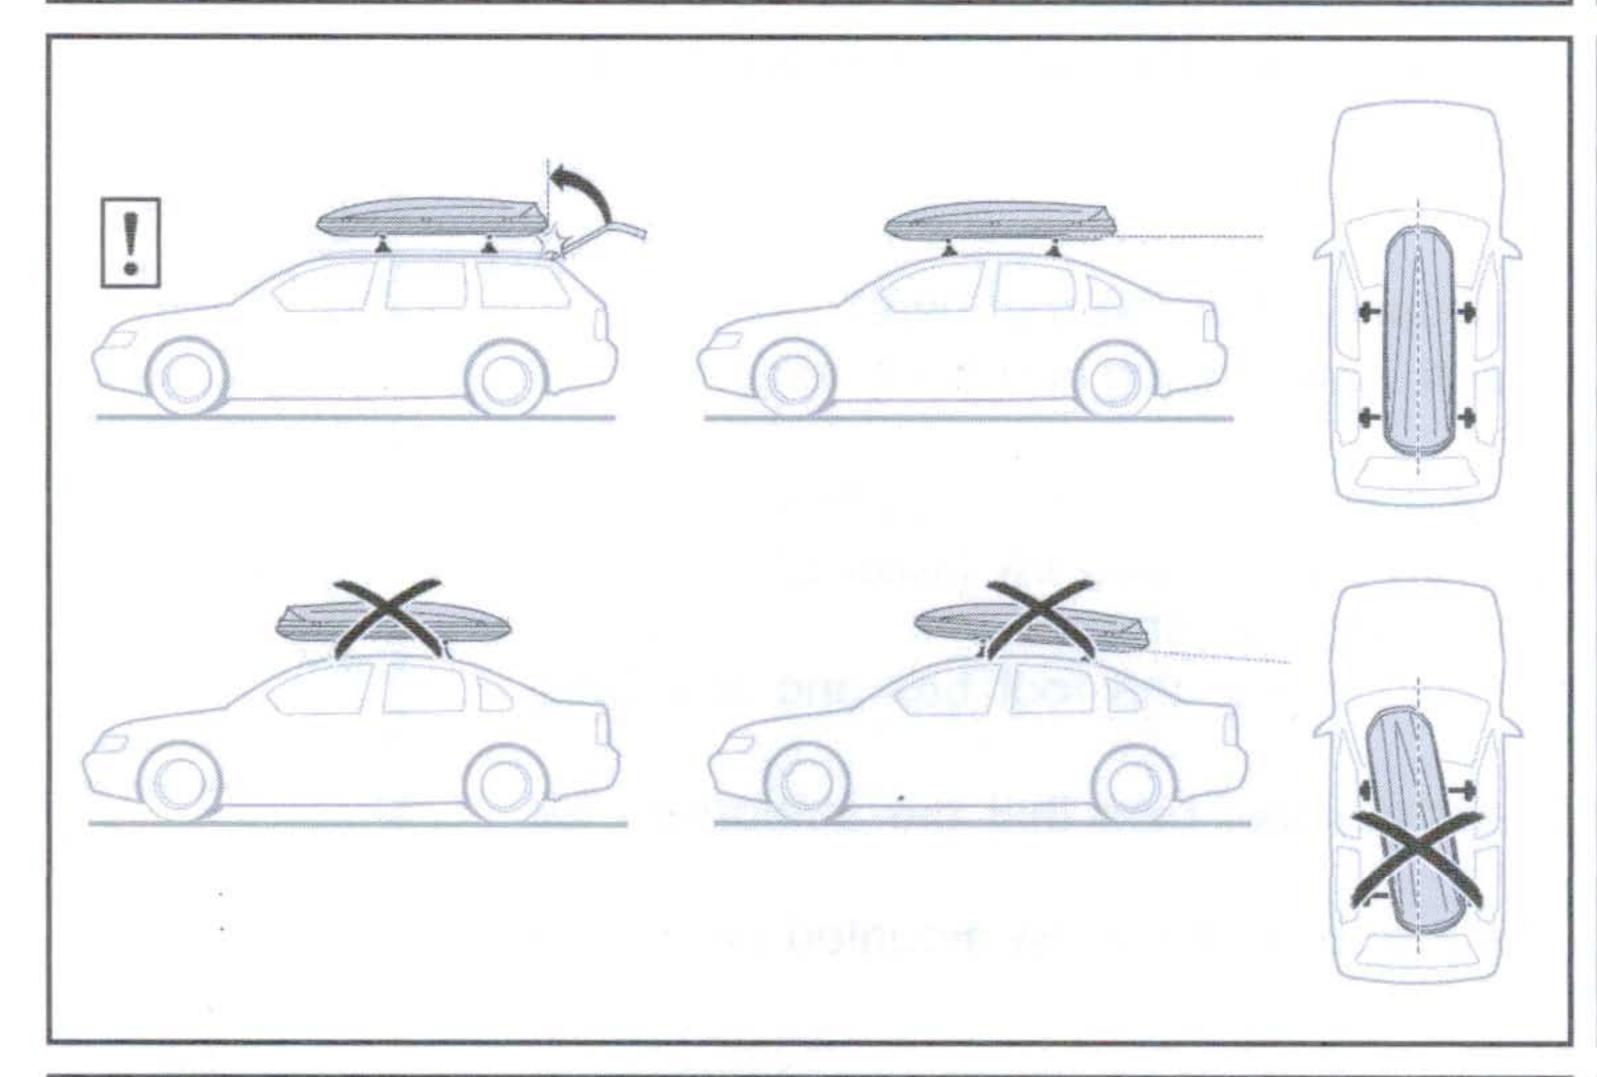


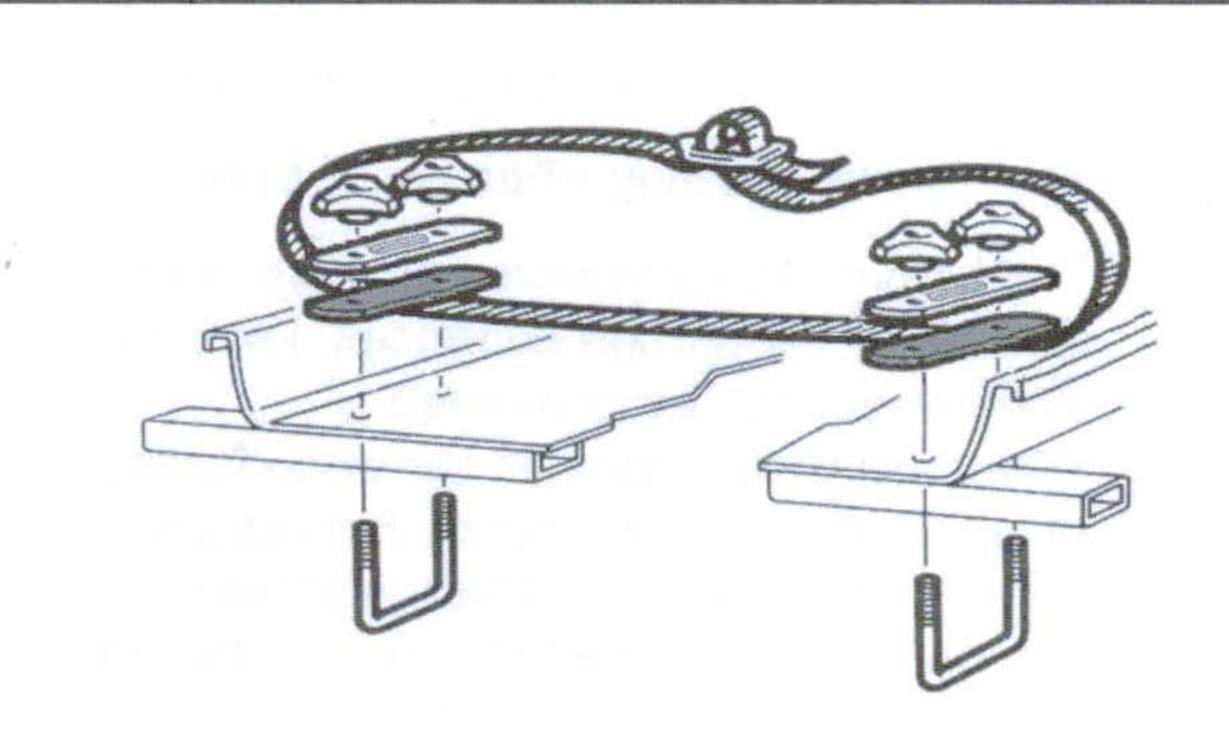


Fit the luggage straps underneath the 'U' bolt plates and rubber gaskets as shown. The metal plates must have the raised area facing upwards.

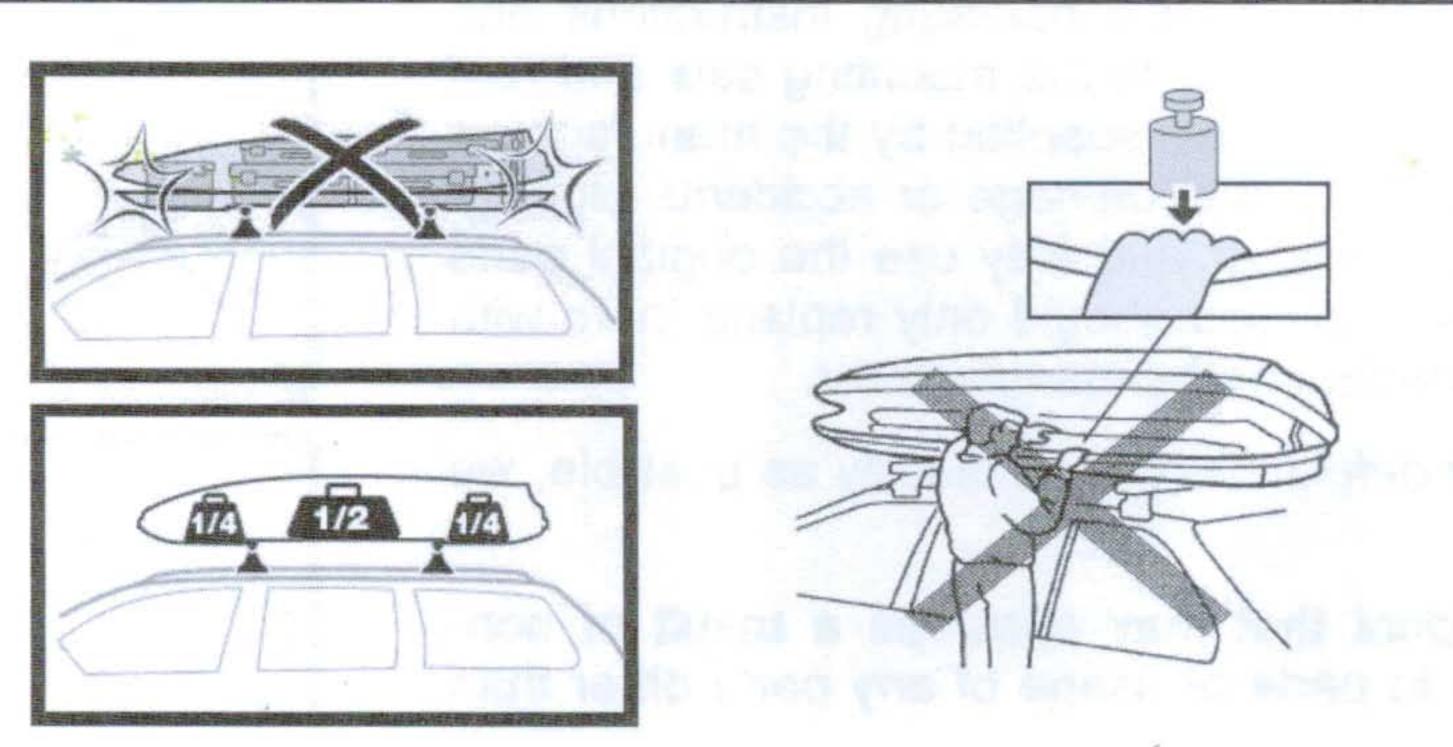


Do not overload the roof box by weight or by volume as this may cause a serious accident!

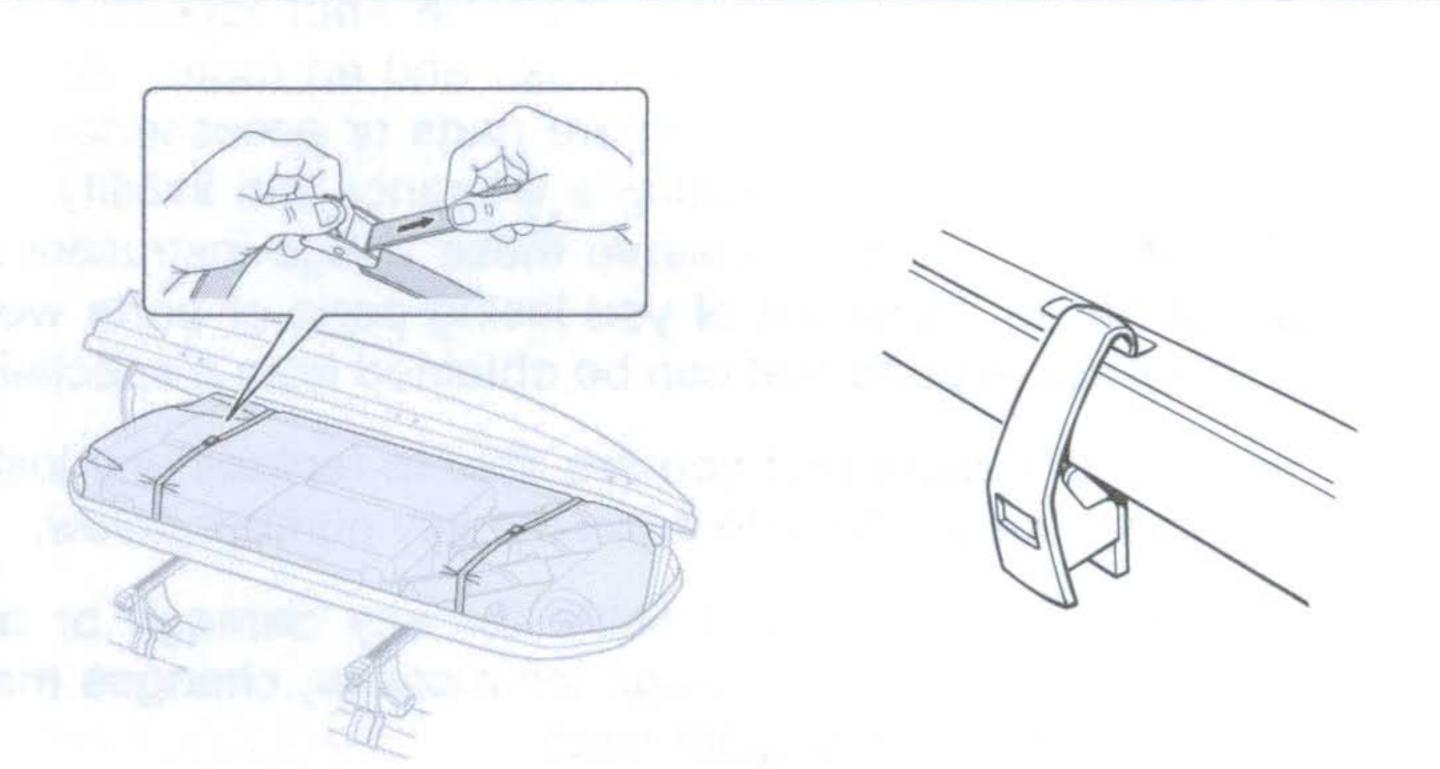



Always secure the load by use of the straps. Ensure the latch at the front of the box is properly engaged if one has been fitted to your roof box.

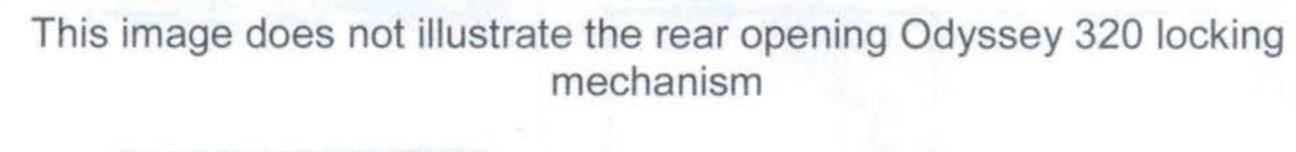

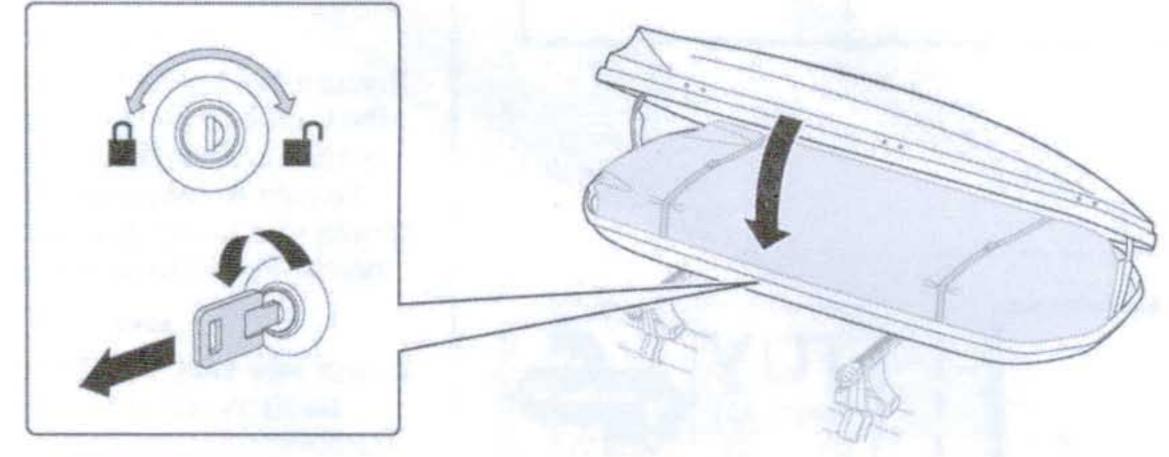

Make sure the roof box is properly closed, completely locked and the key removed before starting your journey. **The key cannot be removed when unlocked on any side opening boxes.

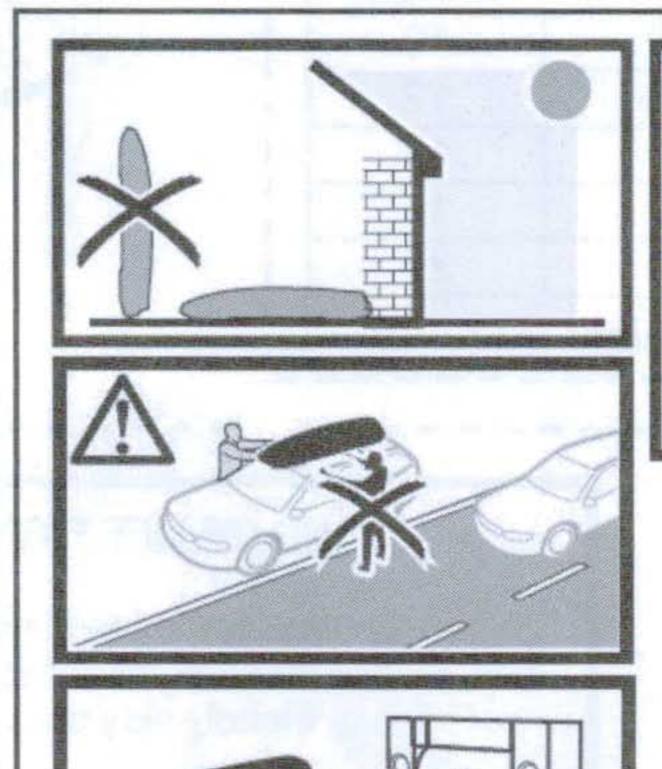

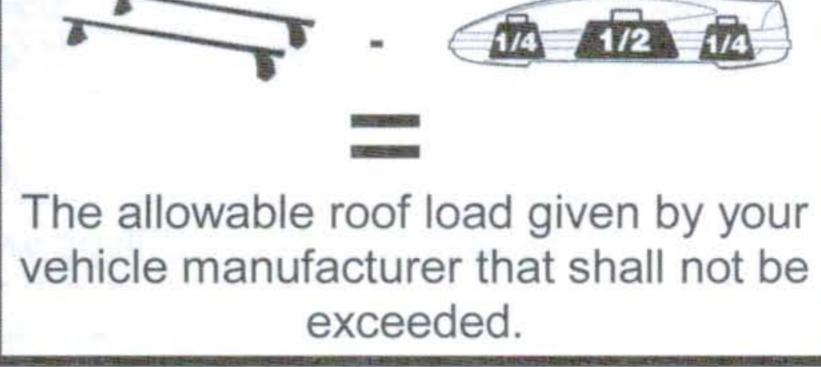

Max.*50Kg

- * Odyssey 580 has a 60Kg max weight limit
- ** The key can be removed when unlocked on the Odyssey 320